

Under-Counter Pharmacy Refrigerator



HYC-118A

HYC-118

Scope of Application :

Versatile, quiet, under-counter pharmacy refrigerator features safety lock, digital display with multiple alarms. Widely used for storage of biological products, vaccines, drugs and reagents in within pharmacy, pharma manufacture, clinical, public health and other life science laboratories.

Innovative Design

- ◉ LED Display
- ◉ Ergonomic Design
- ◉ Multiple Alarms
- ◉ Lockable Design

Haier Biomedical & Laboratory Solutions America LLC

Website: www.haiermedical-usa.com



Haier Biomedical
USA



Haier Biomedical
International



@haiermedicalint



Haier Biomedical
International



Haier Biomedical
International

Product Advantages



Superior Cabinet Temperature Uniformity, Auto Defrost

There are 9 test points within the interior which ensure superior temperature uniformity



Multiple Alarm

Capable of alerting failures due to high and low temperature, sensor error, power failure, low battery, door ajar and remote alarm



Energy Efficient Hydrocarbon (HC) Refrigeration System

Optimised refrigeration system, utilising high-efficiency HC compressor significantly reduces energy consumption



LED Display

Microprocessor control, digital display and temperature adjustment with an increment of 0.1°C



Ergonomic Design

810mm cabinet height makes it easy to place under test bench, saving storage space



Greener by Design


HC refrigerants are natural non-toxic and more environmentally friendly



Lockable Design

Safety lock to prevent unauthorized access

Product Introduction

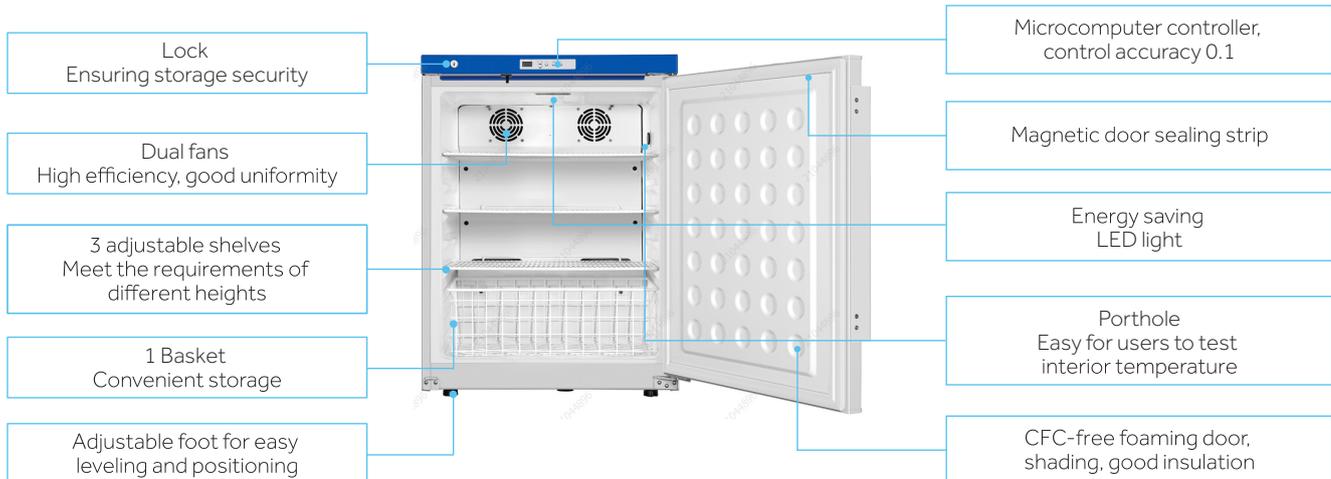


Under-Counter Pharmacy Refrigerator


Temperature Curve



Cooling Down Curve

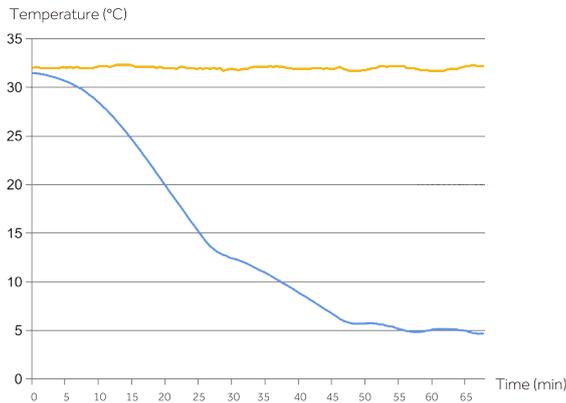

Stability Curve

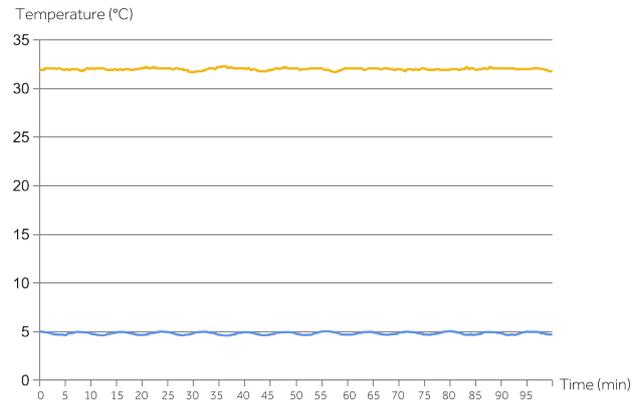

— Internal Temperature
— Ambient Temperature

Specifications



Model		HYC-118	HYC-118A	
Technical Data	Cabinet Type	Upright, solid door	Upright, solid door	
	Cooling Type	Forced air cooling	Forced air cooling	
	Defrost Mode	Auto	Auto	
	Refrigerant	HC	HC	
	Sound Level (dB(A))	41	41	
Performance	Temperature Range (°C)	2-8	2-8	
Control	Controller	Microprocessor	Microprocessor	
	Display	LED	LED	
Electrical Data	Power Supply (V/Hz)	115/60	115/60	
	Power (W)	190	230	
	Electrical Current (A)	1.4	1.5	
Dimensions	Capacity (L/Cu.Ft)	118/4.2	118/4.2	
	Net/Gross Weight (approx)	(kg)	41/46	46/51
		(lbs)	90.5/101.5	101.5/112.5
	Interior Dimensions (W*D*H)	(in)	20.3*16.3*24.8	20.3*16.3*24.8
	Exterior Dimensions (W*D*H)	(in)	23.5*25.0*31.9	23.5*25.0*31.9
Packing Dimensions (W*D*H)	(in)	26.8*27.2*35.8	26.8*27.2*35.8	
Alarms	High/Low Temperature	Y	Y	
	Remote Alarm	Y	Y	
	Power Failure	Y	Y	
	Sensor Error	Y	Y	
	Low Battery	Y	Y	
	Door Ajar	Y	Y	
Accessories	Caster	Y	Y	
	Foot	Y	Y	
	Porthole	Y	Y	
	Shelves/Drawers	3/1	3/1	
Certifications	CE	Y	Y	
	UL	Y	Y	

*Haier Biomedical reserves the right to change products and specifications without prior notice.